


Product number 1799;1800;1801;1802

Sweeping machine

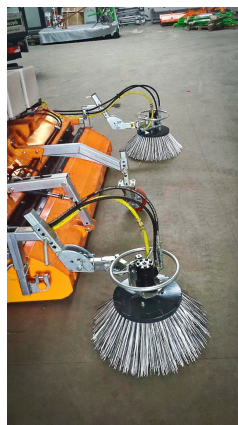

Standard equipment

- 3-point linkage, front or rear
 - Forklift connection (rigid connection)
 - Hydraulic drive (14 kW)
 - Brush with a diameter of 510mm, 1 of 3 types (mix type in standard)
 - PPN-brush (Polypropylene)
 - Spiral brush mix for snow
 - Two road wheels and one support wheel at
- ul. Zakopiańska 9, 30-418 Kraków
Opening hours: 08:00-16:00

Optional equipment

- Garbage container with mechanical discharge using a cable from the vehicle
- Garbage container with hydraulic dump
- Sprinkler system - consists of: tank with a capacity of 175l with external filter, conveying pump / vehicle powered installation: 12 (24v), rod with flat nozzles
- Rotary side brush in three types to choose

the front ø 200x50 with mechanical height adjustment

- Ground contour copying system in two planes
- Diagonal sweeping position (provided - no garbage container)
- Mechanical sweeper angle adjustment

from: mix, ppn or metal type (can be installed on the right or left side or on both sides), the side brush drive installation is equipped with a shut-off valve enabling it to be switched off without disassembly

- Other types of linkage for wheel loaders possible: euro, gehl, jcb, weidemann, thaler, bobcat, schaffer etc.

- Hydraulic working angle adjustment, allowing sweeping without leaving the vehicle

Attention !!! additional hydraulic section required

- Pressure relief valve for loaders with a hydraulic pressure greater than 16mpa
- Oil flow regulator for chargers with a flow rate greater than 60 l /min.
- Reinforced hydraulics for wheel loaders with high oil flow

Technical data

REF.NO.	WORKING WIDTH [M]	WEIGHT [KG]
1799	1,2	150
1800	1,5	200
1801	1,8	250
1802	2,3	300